

SAFETY ALERT!


24/07/2020

Replacing Void Platform Decks

Removing void platform decks to pass large items from ground to first floor can be dangerous and should only be done for the shortest possible period of time and after completing an on-site risk assessment.

Apart from managing the fall zone and the safety of others on site, **incorrect deck replacement by workers on-site can create a serious risk of system failure resulting in serious injury.**

When replacing decks, you must ensure the deck hook is placed securely back over the void deck strut.

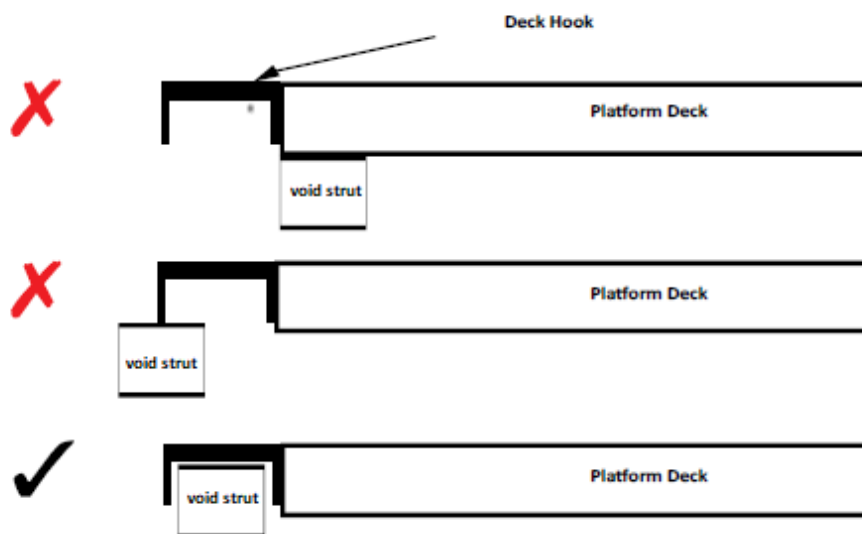

In rare instances where the void platform decks are running directly onto the floor, you must ensure the deck frame sits at least a 50mm over the floor onto a solid surface. Check to make sure timber noggins are also installed in between the hooks of the end decks to restrict sideways movement.

